



In-Use Style

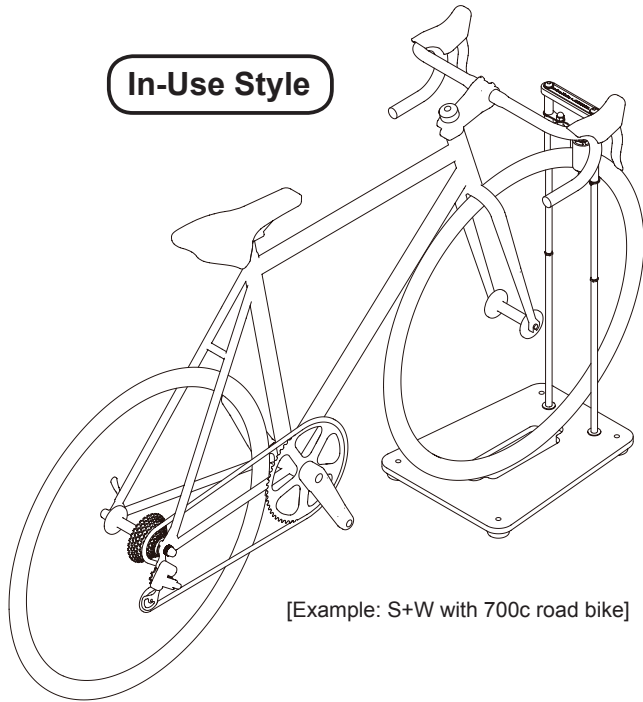

[Example: S+W with 700c road bike]


① Connect the pillars with the tire roller assembly.



Warranty Period : 1 year


Refer to the enclosed warranty card for more details.
Visit www.minoura.jp for the latest information.

② Install the assembled tire roller assembly to the base plate.




③ Finish.


How To Use

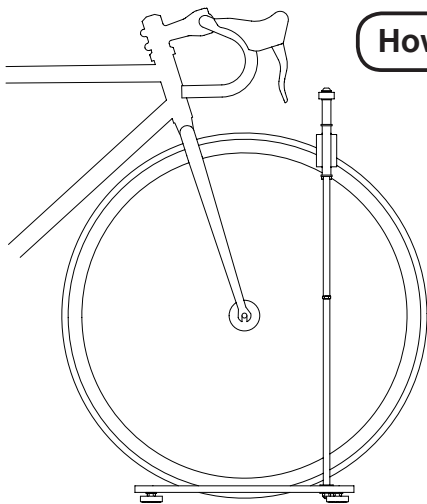

Put the tire into the long slot and apply both rollers to securely hold the wheel.
Depending on the tire size, you may need to adjust the roller position high or low.



High Position Roller





Low Position Roller

Ex.) To set the roller low, move the lower short alloy tube to be pair with the upper tube.

How To Assemble



Required Tool :
13mm spanner

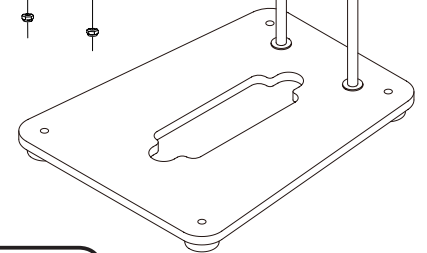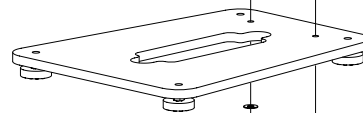

How To Use Rollers

If using narrow 700c tire for road or cross bikes

If using wide 26" MTB or 29" fat bike

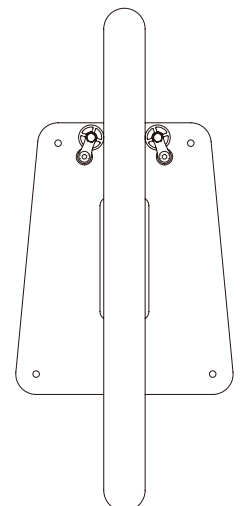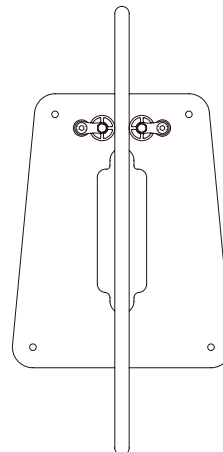

Contact

MINOURA JAPAN

1197-1 Godo, Anpachi, Gifu 503-2305 Japan

Fax: +81-584-27-7505

Email: minoura@minoura.jp

Web: www.minoura.jp

Made in Japan