


- Fits up to 5-inch width fat tire.
- Install the Tire Rack together with the Wheel Support of on the Step-Bar. Be sure the Tire Rack is not fixed and freely movable even though the Wheel Supports are fixed onto the Step-Bar.
- Adjust the Wheel Support frame span prior to installing the Tire Rack.
- The shorter Step-Bar found in the original DS-150 doesn't come with the DS-150F. Only the longer one is in the kit.




Warranty Period : 1-year


For more information, visit:
<http://www.minoura.jp/english/support/cs/contact.html>

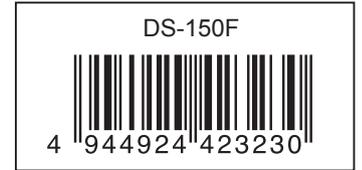

Make sure the shorter guide side is positioned inward of DS-150F.

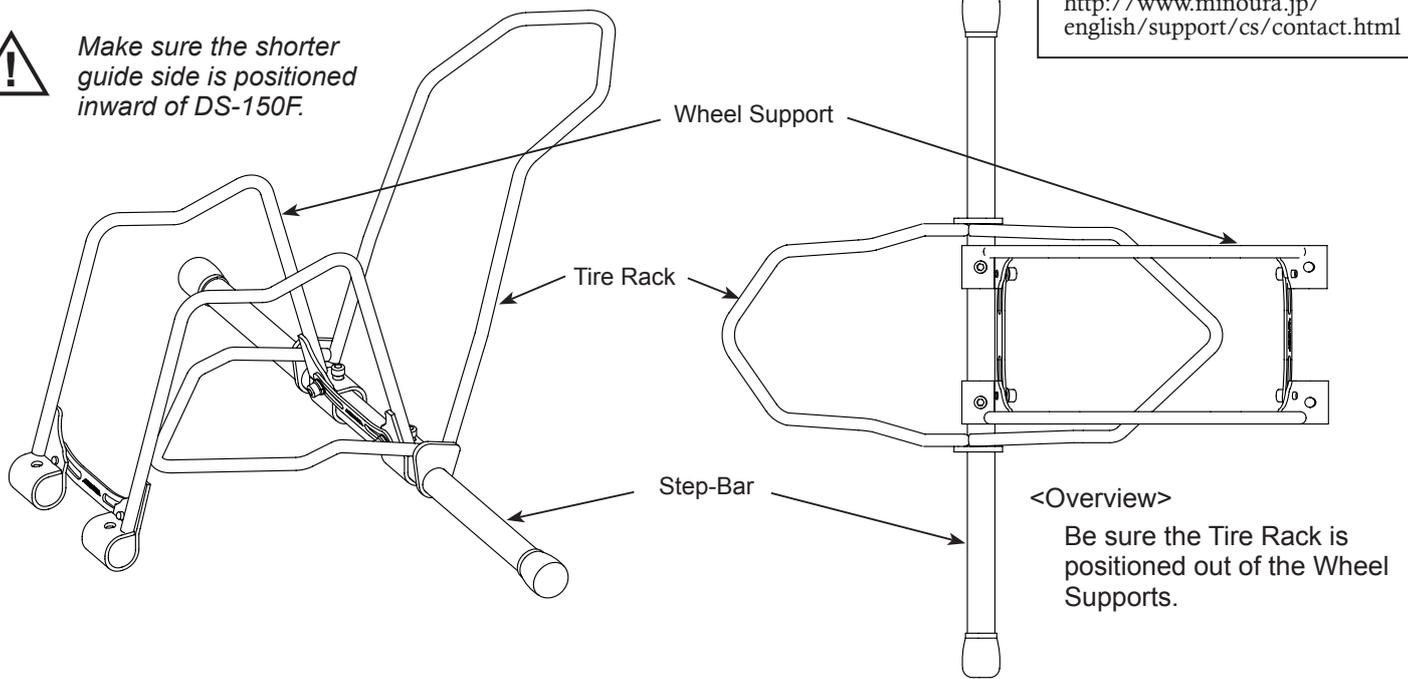


Schematics

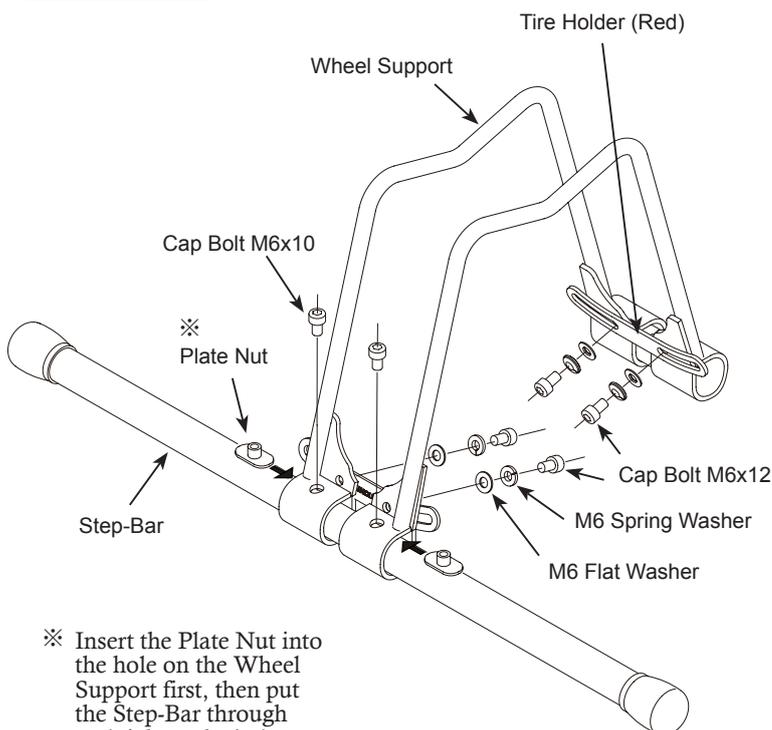

※ Insert the Plate Nut into the hole on the Wheel Support first, then put the Step-Bar through and tighten the bolt from outside to hold.

Adjust The Frame Span

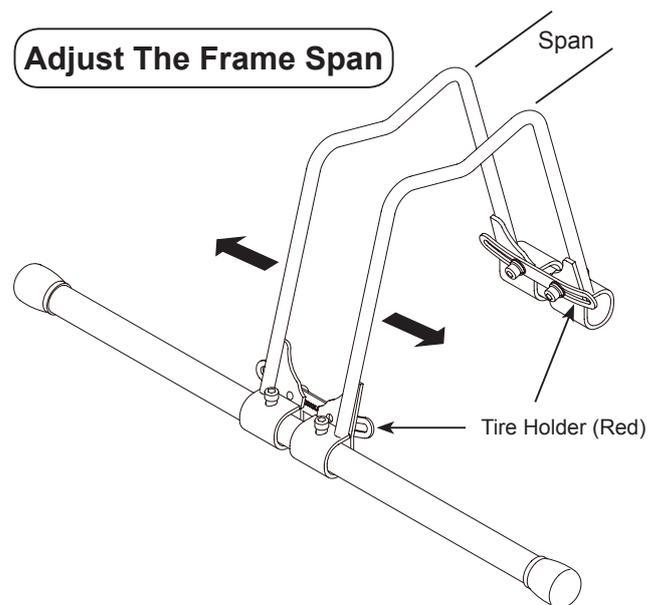

Adjust the Wheel Support frame span to fit the actual tire width.

Loosen the M6x12 Cap Bolts, and change both side Wheel Support frame position as equally as possible while maintaining the red Tire Holder horizontal. After adjustment, tighten the cap bolts firmly.


Using on Rear Tire

While supporting the rear tire by the Wheel Support, holds the tire by the Tire Rack.

Get on the Tire Rack first, then move the bike backward to insert the tire between the Wheel Supports.



When using on the rear tire, shift the rear derailleur a few steps toward low before setting. Leaving it in top gear, the derailleur arm could be damaged due to the contact with the Wheel Support frame.

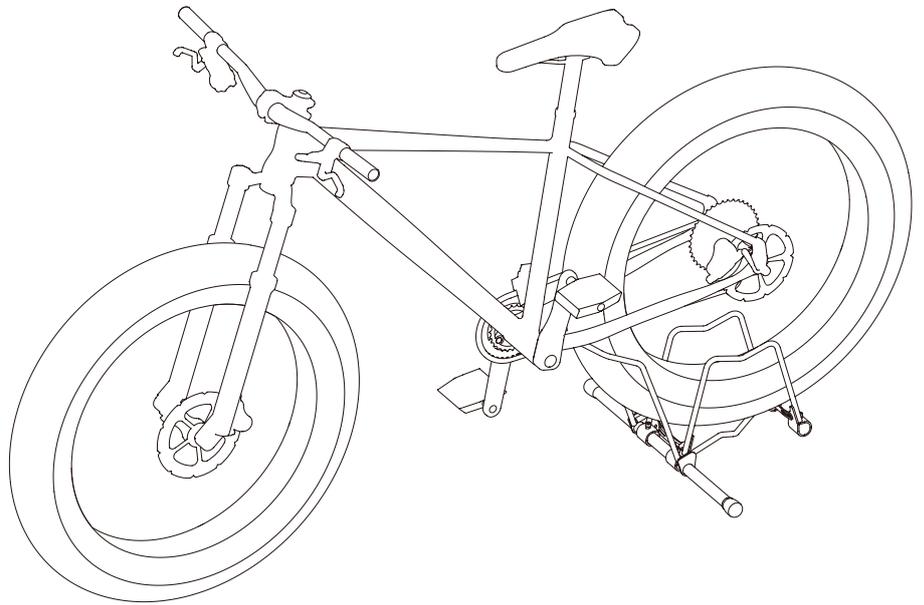

Using on Front Tire


Use as same as for the front tire. Make sure the longer side of the Tire Rack is facing to the bike center.



When you use on the front tire, make sure the steering is not angled but straight in order to prevent the bike from falling down. If the bike has been steered, it will have to be leant due to the bike frame mechanism and get unstable.




Using a single DS-150F is not as stable as using than in a multiple configuration. To prevent the bike from tipping, be sure to set up the Step-Bar symmetrically.

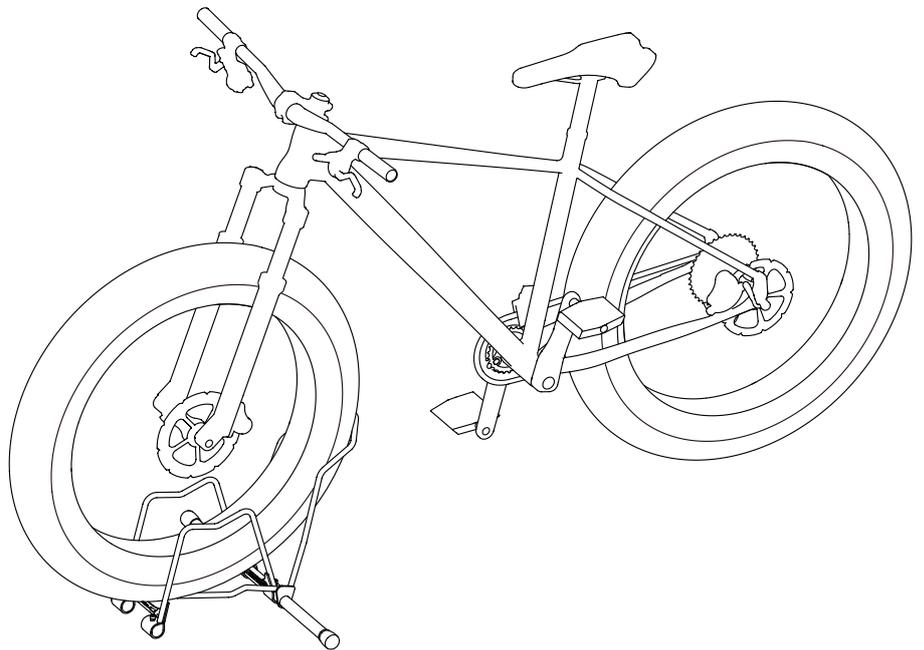

Connecting DS-150Fs

We suggest using multiple DS-150Fs for better support than a single DS-150F. To connect the stands, change the Step-Bar clamping position to the end, then clamp the next DS-150F at another end.

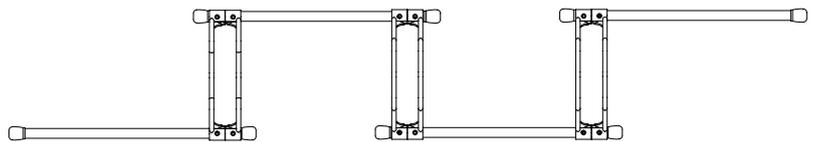

[Example : configuration of three DS-150F stands]



When using a single DS-150F, set the frames to the center of the Step-Bar symmetrically to achieve maximum stability.



You will see two Plate-Nuts and two M6x10 Bolts will be left when you assemble just single DS-150F. These are for connecting another DS-150, 150F or 110 stand. It's not the wrong number.

Contact

Made in Japan

MINOURA JAPAN

1197-1 Godo, Anpachi, Gifu 503-2305 Japan

URL: www.minoura.jp / Email: minoura@minoura.jp